



Colonna senza testa / Straight guide pillar

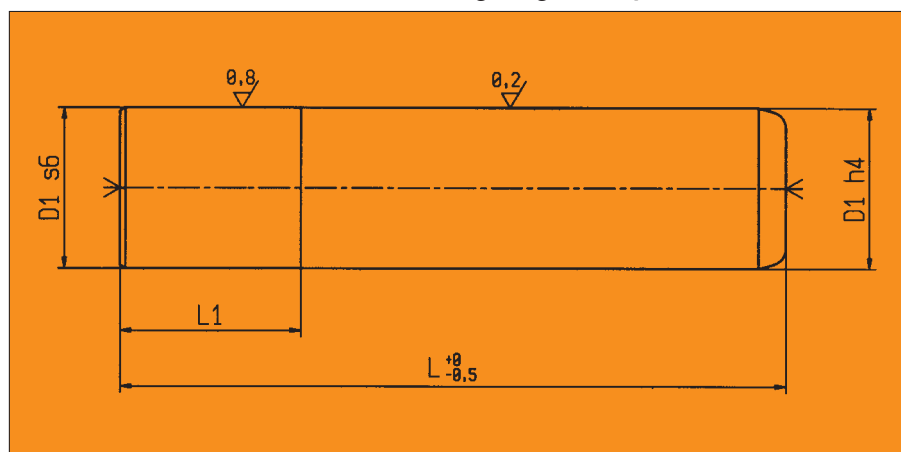

ECO - 4

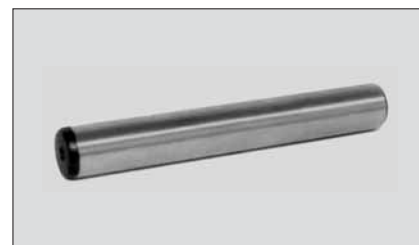

Acciaio: UNI C 53

Durezza: in superficie 60-63 HRC
Resistenza al cuore 900 N/mm²

Esecuzione: temperate per induzione, rettificate, lappate

Steel: UNI C 53

Hardness: 60-63 HRC on surface
Resistance at the core 900 N/mm²

Execution: Hardened for induction, grinded, lapped.

D1	L1	L=85	95	105	115	125	135	145	155	170	185	200	225	250	275	300	325	350	400
15-16	16	—	—	—	—	—	—	—	—										
17-18	18	—	—	—	—	—	—	—	—	—	—	—							
19-20	20	—	—	—	—	—	—	—	—	—	—	—							
24-25	25				—	—	—	—	—	—	—	—	—	—					
30-31	30				—	—	—	—	—	—	—	—	—	—	—	—			
40-41	40							—	—	—	—	—	—	—	—	—	—	—	—
50-51	50									—	—	—	—	—	—	—	—	—	—
63	63												—	—	—	—	—	—	—

Esempio di ordinativo: D1 x L