



Espulsore a testa cilindrica temperato con ribasso

Hardened shoulder ejector pin cylindrical head

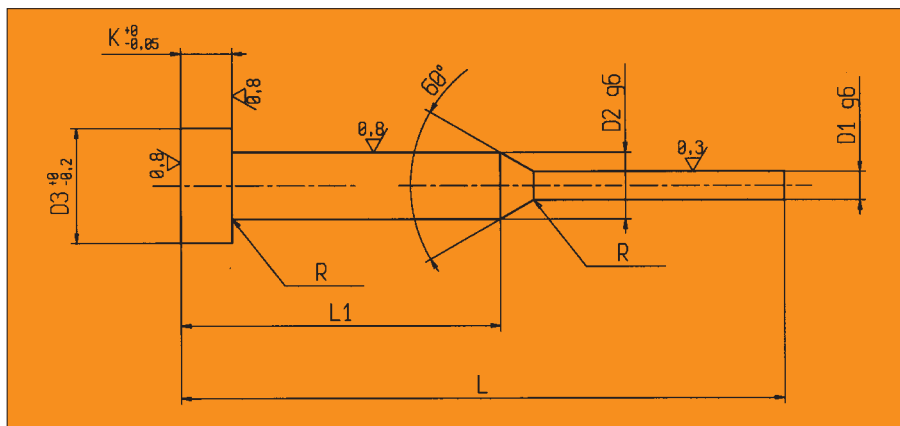

EES - 3T

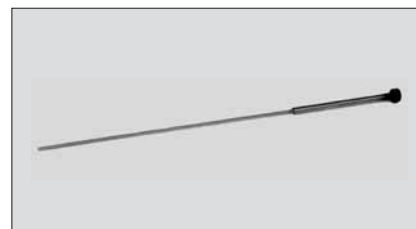

Acciaio: UNI 90 Mn V Cr 8 KU
(DIN 17350 - 90 Mn Cr V 8 - W Nr 1.2842)

Steel: UNI 90 Mn V Cr 8 KU
(DIN 17350 - 90 Mn Cr V 8 - W Nr 1.2842)

Durezza: Corpo 60 ± 2 HRC
Testa 45 ± 5 HRC

Hardness: Body 61 ± 2 HRC
Head 45 ± 5 HRC

Esecuzione: Rettificato, lappato

Execution: Grinded, lapped

| D2 | D3 | K | L | L1 | D1 | | |
|----|----|---|-----|-----|-----|---|-----|
| | | | | | 1,5 | 2 | 2,5 |
| 3 | 6 | 3 | 100 | 50 | — | — | — |
| 3 | 6 | 3 | 125 | 50 | — | — | — |
| 3 | 6 | 3 | 160 | 63 | — | — | — |
| 3 | 6 | 3 | 200 | 80 | — | — | — |
| 3 | 6 | 3 | 250 | 100 | — | — | — |

Esempio di ordinativo: D1 x L