
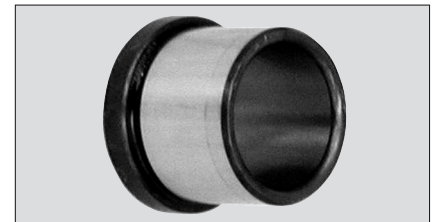


Bussola di guida con collare • Headed guide bush

UNI ISO 8019

EBU-1H

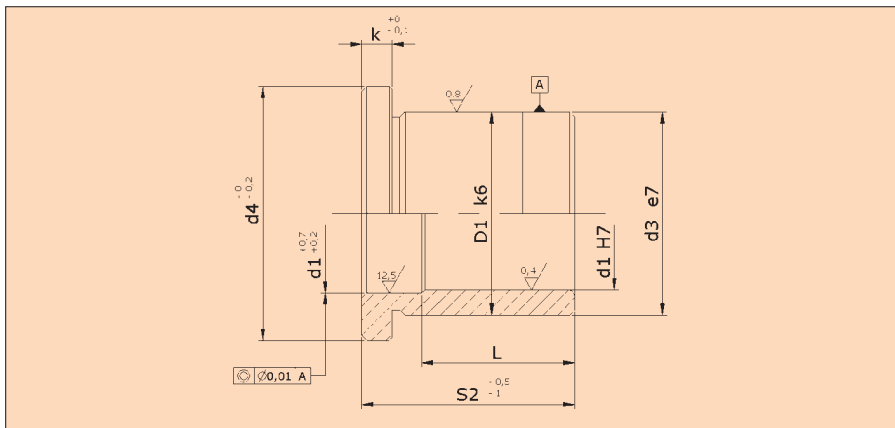

Acciaio: UNI 16 Ni Cr 4
Steel: UNI 16 Ni Cr 4

Durezza: HRC 60 - 62
Hardness: HRC 60 - 62

Esecuzione: Cementato, temperato, rettificato
Execution: Carburized, hardened, grinded

d ₃	d ₄	K	L	S ₂	∅ d ₁	∅ d ₁
20	25	6	22	22	14	15
			27	27		
			36	36		
			46	46		
			56	56		
			56	66		
			56	76		
26	31	6	22	22	18	20
			27	27		
			36	36		
			46	46		
			56	56		
			66	66		
			76	76		
			76	86		
76	96					
30	35	6	22	22	22	24
			27	27		
			36	36		
			46	46		
			56	56		
			66	66		
			76	76		
			86	86		
			96	96		
			96	116		

d ₃	d ₄	K	L	S ₂	∅ d ₁	∅ d ₁
42	47	6	27	27	30	32
			36	36		
			46	46		
			56	56		
			66	66		
			76	76		
			86	86		
54	60	10	96	96	40	42
			116	116		
			116	136		
			116	156		
			116	196		

Esempio di ordinativo: d1 x S2

